
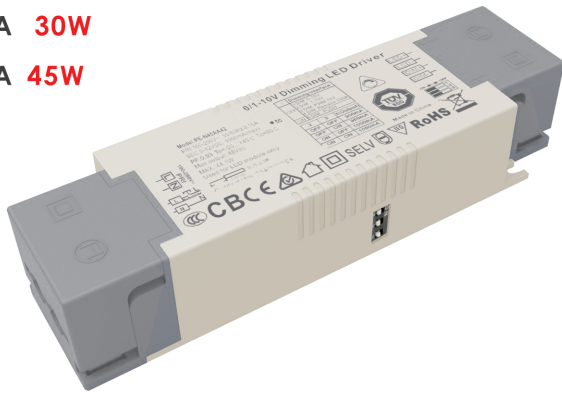




PE-N30AA 30W**PE-N45AA 45W****Features:**

- Integrated 0-10V/1-10V/10V PWM/100k resistor dimming
- Output flicker free
- International universal AC input voltage(100-265VAC)
- Protections: short circuit-over voltage/over current
- Silica gel heat conduction technology, natural cold wind
- Built-in MCU, will adaptive 0-10V and 1-10V
- Dimming range 0-100%
- Quick press terminal, safe and convenient
- The internal design signal is connected to the reverse circuit, one of which will not affect the control of other driver
- Protection class II
- Five years warranty



5 years

**RoHS SELV Class 2****General description:**

0-10V/1-10V/10V PWM/100K resistor dimming driver is one of the constant current dimming LED driver developed by my company with high power factor, high efficiency, high precision, the use of the efficient stable low loss switch control chip and the high performance components makes it with low noise, energy saving, environmental protection, long life and other characteristics.

PE-N30AA/PE-N45AA have five dimming function ,use the DIP switch to choose the PUSH dimming.


1.Dimming interface:1.0-10V dimming, use standard 0-10V/100K 10V PWM dimming.

2.PUSH dimming.

Specification:

Model		PE-N30AA42	PE-N45AA42
OUTPUT	Output Voltage	9-42Vdc	9-42Vdc
	Max Output Voltage	42Vdc	42Vdc
	Non-load Output Voltage	55Vdc	55Vdc
	Output Current	550/600/650/700mA	900/950/1000/1050mA
	Output Power	4.95W~29.4W	8.1W~44.1W
	Strobe Level	No Flicker	
	Dimming Range	0~100%, LEDstart at 0.03%possible.	
	PWM Dimming Frequency	>3600Hz	
	Current Accuracy	±3%	
	Ripple & Noise	≤2V (No dimming)	
INPUT	Dimming Interface	0-10V/1-10V/10V PWM/100K resistance , Signal control current < 0.1mA	
	Input Voltage Range	100-250Vac	
	Frequency	50/60Hz	
	Input Current	<0.37A	<0.56A
	Power Factor	PF>0.95/100V ac, at full load	PF>0.95/100V ac, at full load
	THD	230Vac@THD ≤15% (full load)	
	Efficiency(typ.)	85%full load	87%full load
	Inrush Current(typ.)	Cold start 3.7A@230Vac	Cold start 5.6A@230Vac
	Anti Surge	L-N: 2kV	
	Leakage Current	<0.25mA/230Vac	
ENVIRONMENT	Working Temperature	ta: 45°C tc: 80°C	
	Working Humidity	20 ~ 95%RH, non-condensing	
	Storage Temp., Humidity	-40 ~ 80°C 10~95%RH	
	Temp. Coefficient	±0.03%/°C(0-50 °C)	
	Vibration	10~500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes.	
PROTECTION	Over-heat Protection	Intelligently adjusting or turning off the output current if the PCB temperature ≥110°C, , auto recovers.	
	Over Load Protection	Shut down the output when rated power ≥102%, auto recovers.	
	Short Circuit Protection	Shut down automatically if short circuit occurs, auto recovers.	
	Non-load Protection	output Constant Voltage.	
SAFETY & EMC	Withstand Voltage	I/P-O/P: 3750Vac	
	Isolation Resistance	I/P-O/P: 100MΩ /500VDC/25°C/70%RH	
	Safety Standards	IEC/EN61347-1, IEC/EN61347-2-13	
	EMC Emission	EN55015, EN61000-3-2 Class C, IEC61000-3-3	
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547	
	Strobe Test Standard	IEEE 1789	
OTHERS	Dimension	147.5(117)×43×30mm(L×W×H)	
	Packing	PE bag	
	Weight(G.W.)	187/245g±10g	

Dimensions :

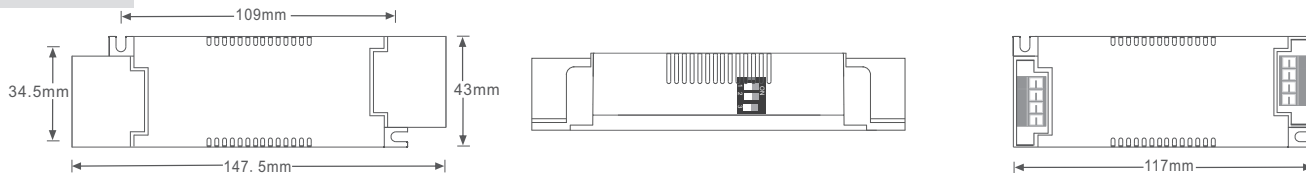

Product Label :

mm 0/1-10V Dimming LED Driver
 Model: PE-N30AA42
 PRI: 100-250V~ 50/60Hz 0.37A
 SEC: 9-42VDC 700mA(max)
 PF: 0.93 Ta=-20...+45°C Tc=80°C
 Max. output: 55Vdc
 MAX.: 29.4W
 Used for LED module only

1 Dimming interface	
1 DIM: 0-10V	LED-
2 DIM: 1-10V	LED+
3 DIM: PWM 10V	DIM+
4 DIM: Resistor 100K	DIM-
ON DIM: PUSH	

2 3 1(Output)	
OFF OFF 550mA	LED-
OFF ON 600mA	LED+
ON OFF 650mA	DIM+
ON ON 700mA	DIM-

7-8mm 0.75-2.5mm
 Made in China
 TOV 80D
 CBCE SELV RoHS

mm 0/1-10V Dimming LED Driver
 Model: PE-N45AA42
 PRI: 100-250V~ 50/60Hz 0.56A
 SEC: 9-42VDC 1050mA(max)
 PF: 0.93 Ta=-20...+45°C Tc=80°C
 Max. output: 55Vdc
 MAX.: 44.1W
 Used for LED module only

1 Dimming interface	
1 DIM: 0-10V	LED-
2 DIM: 1-10V	LED+
3 DIM: PWM 10V	DIM+
4 DIM: Resistor 100K	DIM-
ON DIM: PUSH	

2 3 1(Output)	
OFF OFF 900mA	LED-
OFF ON 950mA	LED+
ON OFF 1000mA	DIM+
ON ON 1050mA	DIM-

7-8mm 0.75-2.5mm
 Made in China
 TOV 80D
 CBCE SELV RoHS

LED Current Selection:



2 and 3 are the DIP switch for 4 optional currents' quick selection, 1 is the switch select dimming function(see the table below).

PE-N30AA42	DIP Switch					PE-N45AA42					ON-OFF
	Output Current		550mA	600mA	650mA		700mA	900mA	950mA	1000mA	
Output Voltage		9-42V	9-42V	9-42V	9-42V	9-42V	9-42V	9-42V	9-42V		
Output Power		4.5W-23.1W	5.4W-25.2W	5.8W-27.3W	6.3W-29.4W	8.1W-37.8W	8.5W-39.9W	9W-42W	9.45W-44.1W		

*After current setting by DIP switch, power off and then power on to make the new current effective.

*E.g. LED 3.2V/pcs: 9-24V can power 3-7pcs LEDs in series, 9-42V can power 3-12pcs LEDs, the max quantity of LEDs in series will be subject to the actual voltage of LED.

LED Current Selection:

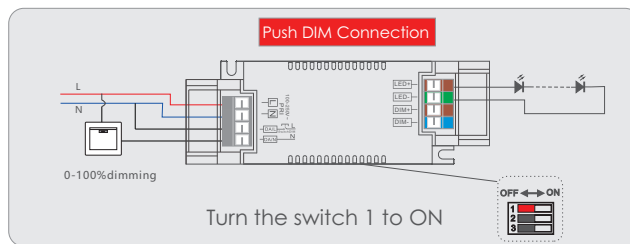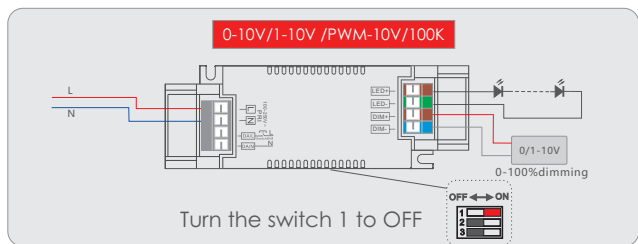

Push Dimming:




- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.

Wiring:

- PUSH interface: AC voltage is connected to Dali two ports through a switch with automatic reset to realize key dimming. Single press switch function, long press dimming.
- 0-10V interface: 0-10V dimmer interface, 100k resistance dimmer without positive and negative, 0 / 1-10V dimmer with positive and negative.
- Do not connect voltage higher than 10V at 0-10V interface.
- The input terminal: wire gauge 22AWG-14AWG (0.5mm² - 1.5mm²) wire stripping requirement: 9-10mm.
- The output terminal: wire gauge 22AWG-12AWG (0.5mm² - 1.5mm²) wire stripping requirement : 6-7mm.

Relationship Diagrams:

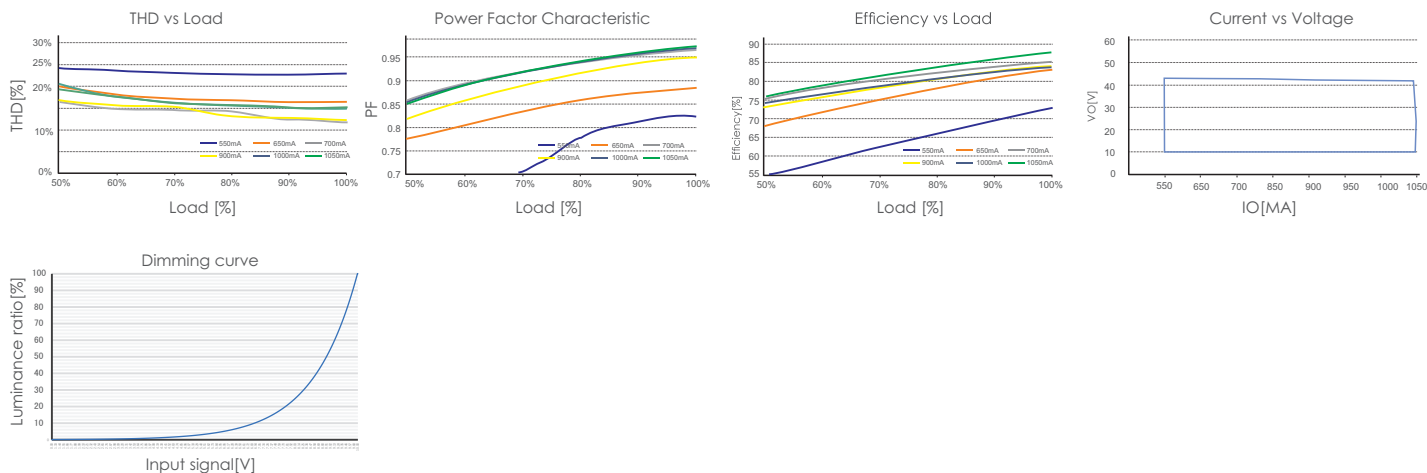

The use of guidance:

- **1. please pay attention to the distinction between input and output, connect correctly, then power on.
- **2. please connect first the load of the DC output, open the driver after checking; in the constant current mode, if power on at open circuit, please turn off the driver and can't connect the LED until the electric energy stored by the output release, or it may damage the LED.
- **3. this type of driver is only limited to the use of the LED lamps, the input voltage range is AC100-265V, the heat insulation cotton and other items that obstruct the heat dissipation of the product, which conforms to the product under the specified output voltage, current range, the use environment temperature is -20-45 degrees, and the surface can not cover the conditions of the environment, this product enjoys five years of free warranty.

The abnormal conditions and the corresponding treatment methods:

1. the LED lamp doesn't bright after the driver is connected at the first time, please turn off the AC input and check as follow:
 - 1) whether or not DC output bad contact.
 - 2) whether DC output polarity is reversed, or the LED board is welded anti.
 - 3) whether AC input is bad contact, test after eliminating these failures.
2. the device has good connection, LED lights, but the LED flicker, please turn off the AC input and check as follow:
 - 1) whether or not the parameters and actual parameters match.
 - 2) please timely communicate with us if you have any questions in the using, we will try our best to solve the problems with you.

Statement:

The pictures and specifications is for reference only, in kind prevail, specifications are subject to change with further notice.

Difference between 0-10V and 1-10V:

1. When the 0 / 10V dimmer is adjusted to the maximum 10V, the output current will reach 100% of the power output, and the brightness will reach 100%. When the 0-10V dimmer is adjusted to 0V, the current will be the minimum, and the light will be turned off; When the 1-10V dimming is adjusted to 1V, the current is the minimum and the light is off.
2. Difference between 0-10V and 1-10V dimming: different starting and closing voltage, 0-10V is on at 0.7V, (the min brightness) 1-10V is on at 1.2V (the min brightness).
3. Digital dimming driver 0-10V and 1-10V dimming automatic identification two dimming modes.
4. The same signal circuit controls light and dark at the same time.
5. Dimmer (dimming system) is divided into 0-10V and 1-10V dimming signals.
6. Dimming compatibility is related to the control distance of signal line and the number of control power supply. If the number is too large or the signal line is too long, problems such as can not adjusted lower and can not adjusted off will occur.